证明

CERTIFICATE

本证明之附件是向中国专利局作为受理局提交的下列国际申请副本

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY OF THE BELOW IDENTIFIED INTERNATIONAL APPLICATION THAT WAS FILED WITH THE CHINESE PATENT OFFICE AS RECEIVING OFFICE

国际申请号:

PCT/CN02/00843

INTERNATIONAL APPLICATION NUMBER

国际申请日:

25 NOV 2002(25.11.02)

INTERNATILNAL FILING DATE

发明名称:

An Exchange Method and Mechanism for a

TITLE OF INVENTION

Component of the Magnetic Head and the Suspension or the Head Gimbal Assembly of the Hard Disk Driver During Manufacture

申 请 人:

SAE MAGNETICS(H.K.)LTD

APPLICANT

中华人民共和国国家知识产权局局长
COMMISSIONER OF THE STATE INTELLECTUAL PROPERTY
OFFECE OF THE PEOPLE'S REPUBLIC OF CHINA

王孝川

二零零三年一月七日 JANUARY. 7, 2003



POT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

- For receiving Office use only -

International Application No.

2 5 NOV 2002 (25. 1 1. 0

International Filing Date

RO/CN 中华人民共和国国家知识产权局 PCT International Application
Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference (if desired) (12 characters maximum) FPEL02150039

Box №. I TITLE OF INVENTION An Exchange Method and Mechanism for a Component of the Magnetic Head and the Suspension or the Head Gimbal Assembly of the Hard Disk Driver During Manufacture			
Box No. II APPLICANT This person is also inventor			
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include pastal code and name of country. The country of the address indicated in this Bax is the applicant's State (that is, country) of presidence (fin Gare of presidences in indicate below.)		Telephone No.	
SAE MAGNETICS (H. K.) LTD.		Facsimile No.	
SAE Tower, 38-42 Kwai Fung Crescent	Teleprin	Teleprinter No.	
Kwai Chung N. T. Hong Kong Special Administrative Region, P. R. of China		Applicant's registration No. with the Office	
State (that is, country) of nationality:	State (that is, country) of reside CN	nce:	
This person is applicant for the purposes of: all designated States all designated States all designated States	tates except the United so of America		
Box No. III FURTHER APPLICANT(S) AND/OR (FURTHE		*	
Name and address: (Fomily home; followed by given name; for a legal entity. The oldsets must include postat code and mane of course.) The cotatory of the Bost the applicant's State that it, country) of residence if no State of residences VAO, Minggao Winnerway Industrial Area, Nancheng, Dongguan City Guangdong Province, P. R. of China Zip Code: 511700	address valucated in this vindicated below.)	son is: applicant only applicant and inventor inventor only (If this check-bax is marked, do not fill in below.) nt's registration No, with the Office	
State (that is, country) of nationality:	State (that is, country) of reside	nce:	
This person is applicant for the purposes of:	states except the United of America		
Further applicants and/or (further) inventors are indicated on	a continuation sheet.		
Box No. IV AGENT OR COMMON REPRESENTATIVE;	OR ADDRESS FOR CORRE	SPONDENCE	
The person identified below is hereby/has been appointed to act on of the applicant(s) before the competent International Authorities as	behalf agent	common representative	
Name and address: (Family name followed by given name; for a legal entity, The address must include postal code and name of cow	full official designation. Telepho (852)	Telephone No. (852)28284688	
CHINA PATENT AGENT (H.K.) LTD. 22/F, Great Eagle Centre 23 Harbour Road, Wanchai Hong Kong Special Administrative Region The People's Republic of China		Facsimile No. (852)28271018	
		Teleprinter No.	
		Agent's registration No. with the Office	
Address for correspondence: Mark this check-box where no	agent or common representati	e is/has been appointed and the	

Sheet No. 2

	10			
Continuation of Box No. III FURTHER APPLICANT(S)	AND/OR (FURTHER) INVENTOR(S)			
If none of the following sub-boxes is used, this sheet should not be included in the request.				
Name and address: (Family name) fill need by given name; for a legal or The address must help depetied one and one of generary. The country of Bas title applicant's Sunet (helt is, country) of residence (find State of residence (find State of residence) from the first C, 22/F, Tower 9 Laguna Varde (Phase II A) Hung Hom, Kowloon Hong Kong Special Administrative Region P, R, of China	this plut official designation. This person is: the adultrist indicated in this test indicated below.) applicant and inventor inventor only (if this check-box is marked, do not fill in below.) Applicant's registration No, with the Office			
State (that is, country) of nationality:	State (that is, country) of residence:			
This person is applicant all designated all designate for the purposes of: . States all designated the United states.	ed States except the United States the States indicated in States of America only the Supplemental Box			
Name and address: femily name followed by given name; for a legal en fine address must include postal order and name of consur. The commy of Bax the applicant's State (that is, commy) of residence (fine State of resident NIE, Yiru Winnerway Industrial Area, Nancheng, Dongguan City Guangdong Province, P. R. of China Zip Code: 511700	trip, full official designation, the advarse indicated in this applicant only applicant and inventor inventor only (if this check-hox is marked, do not fill in below.) Applicant's registration No. with the Office			
State (that is, country) of nationality: State (that is, country) of residence:				
This person is applicant all designated all designate for the purposes of:	ed States except States of America of America only the States indicated in the Supplemental Box			
Name and address: (Family name followed by given name: for a legal entity, full official designation. The address must include postal code and name of constry: The country of the address midicated in this Box to the applicant's State (that it, country) of residence if in State of residence it independs below; applicant and inventor in inventor only (if this cheek-hox is marked, do not fill in helow) Applicant's registration No. with the Office				
State (that is, country) of nationality:	State (that is, country) of residence:			
This person is applicant all designated all designated	ed States except the United States the States indicated in			
This person is applicant all designated all designated States except the United States the States indicated in fort the purposes of: States the United States of America coal the Supplemental Box Name and address: (Family name followed by given name; for a legal entity, full afficial designation. The address must include postal code and name of country. The country of the address indicated in this hate a the applicant's State (that is, country) of residence if no State of residence is indicated below.) This person is: applicant only applicant only applicant and inventor inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No, with the Office				
State (that is, country) of nationality:	State (that is, country) of residence:			
This person is applicant for the purposes of: all designated the United	ed States except the United States the States indicated in the States of America only the Supplemental Box			
Further applicants and/or (further) inventors are indicated on another continuation sheet.				

Box No.	V DESIGNATION C	F STATES	Mark the applicable check-boxes below	v; at lea	st one must be marked.
The foll	The following designations are hereby made under Rule 4.9(a):				
Region	al Patent				
ПАР	ARIPO Patent: GH	Ghana, GM Ga	ambia, KE Kenya, LS Lesotho, MV	V Mala	wi. MZ Mozambique. SD Sudan.
	SL Sierra Leone, SZ Sv State which is a Contra	aziland, TZ Uni	ited Republic of Tanzania, UG Uganda, he Harare Protocol and of the PCT (if a	ZM Za other kir	mbia, ZW Zimbabwe, and any other ad of protection or treatment desired,
	specify on dotted line).				
☐ EA	Eurasian Patent: AM	Armenia, AZ Az	zerbaijan, BY Belarus, KG Kyrgyzstan,	KZ Ka	zakhstan, MD Republic of Moldova,
	RU Russian Federation Patent Convention and		TM Turkmenistan, and any other State	which is	s a Contracting State of the Eurasian
□ EP	Republic, DE Germany	, DK Denmark,	gium, BG Bulgaria, CH & Ll Switzerlan EE Estonia, ES Spain, Fl Finland, FR IC Monaco, NL Netherlands, PT Portuga	France	GB United Kingdom, GR Greece,
			State of the European Patent Convention		
По			enin, CF Central African Republic, CO		
L OA	GA Gabon, GN Guinea TD Chad, TG Togo, an	, GQ Equatorial d any other State	ll Guinea, GW Guinea-Bissau, ML Ma e which is a member State of OAPI and	li, MR a Contr	Mauritania, NE Niger, SN Senegal, acting State of the PCT (if other kind
	of protection or treatme	n desired, specify	fy an dotted line)		
Nation	al Patent (if other blud .	of protection or ~	reatment desired, specify on dotted line):		
				C >17	New Zealand
	United Arab Emirates				
	Antigua and Barbuda		HR Croatia		
			HU Hungary		
	Armenia				Poland
☐ AT	Austria	🗆 1	IL Israel	☐ PT	Portugal
□ AU	Australia	🖸 1	IN India	□ RC	O Romania
	Azerbaijan				J Russian Federation
			JP Japan		
	Barbados	H:	KE Kenya	Пев	
			KG Kyrgyzstan		
			KP Democratic People's Republic		Singapore
	Belarus				Slovenia
□ BZ	Belize		KR Republic of Korea		
☐ CA	Canada	□ +	KZ Kazakhstan	□ sl	Sierra Leone
□ сн	& LI Switzerland and Lie	chtenstein 🗆 1	LC Saint Lucia	□тл	Tajikistan
K CN	China	🗆 1	LK Sri Lanka		d Turkmenistan
	Colombia		LR Liberia	Пт	Tunisia
			LS Lesotho		
	Cuba				Trinidad and Tobago
	Czech Republic				
				П	
	Germany				United Republic of Tanzania
			MA Morocco		
□ DM	Dominica		MD Republic of Moldova		
DZ.	Algeria			□ US	United States of America
□ EC	Ecuador	D N	MG Madagascar		
□ EE	Estonia	🗆 N	MK The former Yugoslav Republic of	□ U2	Uzhekistan
	Spain				Viet Nam
	Finland				J Yugoslavia
			MWMalawi		
	United Kingdom				
□ GD	Grenada	□ 1	MX Mexico	H ZN	/I ∠ambia
			MZ Mozambique	⊔ Z\	V Zimbabwe
☐ GH	Ghana :		NO Norway		
			es which have become party to the PCT		
□					
□		🗆 .		□	

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by applicant at the expiration of that time limit. (Origination (including, feet) must receive the receiving flow within the 11-mount time limit.)

Andre Sandaria India

Sheet No. ...4...

Box No. VI PRIORITY	CLAIM				
The priority of the following	earlier application(s) is hereb	oy claimed:			
Filing date	Number	Where earlier application is:			
of earlier application of ea (day/month/year)	of earlier application	national application: country or Member of WTO	regional application:* regional Office	international application: receiving Office	
item (1)	,	•			
item (2)	*				
item (3)		·			
item (4)					
item (5)					
Further priority claims a	are indicated in the Suppleme	ntal Box.			
The receiving Office is reque if the earlier application was f above as:	sted to prepare and transmit t filed with the Office which for	to the International Bureau the purposes of this internat	a certified copy of the e tional application is the re	arlier application(s) (only ecciving Office) identified	
all items item (1) item (2)	item (3) item ((4)	other, see Supplemental Box	
* Where the earlier application Industrial Property or one Me	on is an ARIPO application, in ember of the World Trade Or	idicate at least one country ganization for which that ea	party to the Paris Conve arlier application was file	ntion for the Protection of ed (Rule 4.10(b)(ii)):	
Box No. VII INTERNAT	IONAL SEARCHING AUT	HORITY			
Choice of International Sea international search, indicate	rching Authority (ISA) (if to the Authority chosen; the two	wo or more International Se -letter code may he used):	earching Authorities are	competent to carry out the	
ISA /					
Request to use results of ear International Searching Author	rlier search; reference to the	aat search <i>(if an earlier se</i>	arch has been carried ou	t by or requested from the	
Date (day/month/year)	Numb	er Count	try (or regional Office)		
Box No. VIII DECLARAT	TIONS)		
	are contained in Boxes Nos. te in the right column the num			Number of declarations	
Box No. VIII (i)	Declaration as to the identity	y of the inventor		:	
Box No. VIII (ii)	Declaration as to the applic date, to apply for and be gr		international filing		
Box No. VIII (iii)	Declaration as to the appli date, to claim the priority of		ne international filing	:	
Box No. VIII (iv)	Declaration of inventorship United States of America)	o (only for the purposes of	the designation of the	:	
Box No. VIII (v)	Declaration as to non-preju	idicial disclosures or excep	ptions to lack of novelty	:	

	-
Sheet No.	0

Box IX CHECK LIST; LANGUAGE OF FILING					
This international application contains: (a) the following number of sheets in paper form:	This international application is accompanied by the following item(s) (mark the applicable check-boxes below and indicate in right column the number of each item):	Number of items			
request (including	1. 🛣 fee calculation sheet	: ।सि			
declaration sheets) : 5	2. 🖪 original separate power of attorney	: 1			
description (excluding sequence listing part) : 9	3. original general power of attorney	: •			
claims : 4	4. copy of general power of attorney; reference number, if any:	:			
drawings : 12	5. statement explaining lack of signature	:			
Sub-total number of sheets : 31	6. priority document(s) identified in Box No. VI as item(s):				
sequence listing part of description (actual number	7. translation of international application into				
of sheets if filed in paper form, whether or nat also filed in computer readable	8. separate indications concerning deposited microorganism				
form; see (b) below)	or other biological material 9. sequence listing in computer readable form (indicate also type				
(b) sequence listing part of description filed in	and number of carriers (diskette, CD-ROM, CD-R or other)) (i) copy submitted for the purposes of international search	1			
computer readable form (i) only (under Section 801(a)(i))	under Rule 13 <i>ter</i> only (and not as part of the international application)	:			
(ii) ☐ in addition to being filed in paper form (under Section 801(a)(ii))	(ii) (iii) (iii	,			
Type and number of carriers (diskette, CD-ROM, CD-R or other) on which the	Rule 13 ter (iii) together with relevant statement as to the identity	;			
sequence listing part is contained (additional copies to be indicated under item 9(ii), in	of the copy or copies with the sequence listing part mentioned in left column	:			
right column):	10. other (specify):	:			
Figure of the drawings which should accompany the abstract: Fig 5a	Language of filing of the international application: EN				
Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).					
	For receiving Office use only				
 Date of actual receipt of the purported international application: 	25.11.02	rawings: received:			
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported infernational application:					
Date of timely receipt of the required corrections under PCT Article 11(2):		not received:			
International Searching Authority (if two or more are competent): ISA /	6. Transmittal of search copy delayed until search fee is paid				
For International Bureau use only					
Date of receipt of the record copy by the International Burcau:					

(

This sheet is not part of and does not count as a sheet of the international application.

1	2C1	For receiving Office us	e only	
FEE CALCULATION SHEET Annex to the Request		International Application No. PCT/CN 02/ 0 08 43		
Applicant's or agent's file reference	FPEL02150039	2 5 NOV 2902	(25. 11.02)	
Applicant		1		
SAE MAGNETICS (HKNITO	10		
CALCULATION OF PRES				
		I CNY500 ITI	CN Y5001	
1. TRANSMITTAL FEE .		CNY1500 [S]	CNYTOU	
SEARCH FEE International search to be		[
Af two or more International	Searching Authorities are competent to carry the Authority which is chosen to carry out the i	out the international international search.)		
3. INTERNATIONAL FEE Basic Fee				
	. IX applies, enter Sub-total number of . IX does not apply, enter Total number		- 1526	
bl first 30 sheets	L	CHF650 bi	JHF 350.	
b2 1	x CHF15 =	CHF15 62	24515	
number of sheets in excess of 30	s fee per sheet			
b3 additional componen	t (only if sequence listing part of descripted able form under Section 801(a)(i), or on paper, under Section 801(a)(ii)):	ption		
· ·	400 x =	<u>Б</u> 31		
1	fee per sheet			
Add amounts entered at b	1, b2 and b3 and enter total at B	CHF665 B	<u>OHF 665.</u>	
Designation Fees The international applicati	ion contains 1 designations.	Community		
1	x CHF140 =	CHF140 D	CHF140,-	
number of designation fee payable (maximum 5)	es amount of designation fee			
Add amounts entered at B	and D and enter total at I	CHF805 I	CHF 805	
(Applicants from certain international fee, Where the	States are entitled to a reduction of 7: applicantis (or all applicants are) so entitle the sum of the amounts entered at B and I	5% of the cd, the total		
4. FEE FOR PRIORITY DO		P		
4. PEETOKTROMIT DO	COMERCE (y applicable)		CN (2000)-	
5. TOTAL FEES PAYABLE		CNY2000CHF805	CHF80T	
Add amounts entered at T,	S, I and P, and enter total in the TOTAL	box TOTAL		
The designation fees are	not paid at this time.			
MODE OF PAYMENT				
authorization to charge deposit account (see belo		ash coupons		
cheque	bank draft	revenue stamps other (specif	y):	
	ARGE (OR CREDIT) DEPOSIT ACC the available at all receiving Offices)	Receiving Office: ROZ ON		
Authorization to charge t	the total fees indicated above.			
(This check-box may be may	arked only if the conditions for deposit acco	nonts Date: //8/11/2002	<u> </u>	
of the receiving Office so t	permit) Authorization to charge any deficient in the total fees indicated above.	ency Name: Name: 學用字 以	5/1	
Authorization to charge		Signature:	<i>"</i>	
L	anuary 2002; reprint July 2002)	* 17	to the fee calculation sheet	

15

An Exchange Method and Mechanism for a Component of the Magnetic Head and the Suspension or the Head Gimbal Assembly of the Hard Disk Driver During Manufacture

5 Background Information

[0001] The present invention relates to magnetic hard disk drives. More specifically, the present invention relates to a method of inspecting magnetic read/write heads and micro-actuators during the manufacturing process.

[0002] In the art today, different methods are utilized to improve recording density of hard disk drives. Figure 1 provides an illustration of a typical disk drive with a typical drive arm 102 configured to read from and write to a magnetic hard disk 104. Typically, voice-coil motors (VCM) 106 are used for controlling a hard drive's arm 102 motion across a magnetic hard disk 106. Because of the inherent tolerance (dynamic play) that exists in the placement of a recording head 108 by a VCM 106 alone, micro-actuators 110 are now being utilized to 'fine-tune' head 108 placement. A VCM 106 is utilized for course adjustment and the micro-actuator 110 then corrects the placement on a much smaller scale to compensate for the VCM's 106 (with the arm 102) tolerance. This enables a smaller recordable track width, increasing the 'tracks per inch' (TPI) value of the hard drive (increased drive density).

20 [0003] Figure 2 provides an illustration of a micro-actuator as used in the art. Typically, a slider 202 (containing a read/write magnetic head; not shown) is utilized for maintaining a prescribed flying height above the disk surface 104 (See Figure 1). Micro-actuators may have flexible beams 204 connecting a support device 206 to a slider containment unit 208 enabling slider 202 motion independent of the drive arm 102 (See Figure 1). An

electromagnetic assembly or an electromagnetic / ferromagnetic assembly (not shown) may be utilized to provide minute adjustments in orientation/location of the slider/head 202 with respect to the arm 102 (See Figure 1).

[0004] The component parts of the hard disk drive usually need to be inspected on each side during the manufacture. Normally, this involves removing the parts from their packing trays one by one with a pair of tweezers or air tweezers. This handling often leads to damage to the component, as well as taking a great deal of time, which increase the unit cost of the component of the hard disk drive.

Brief Description Of The Drawings

10

20

- [0005] Figure 1 provides an illustration of an internal view of a hard disk drive including a drive arm configured to read from and write to a magnetic hard disk as used in the art.
- [0006] Figure 2 provides an illustration of a micro-actuator as used in the art.
- 5 [0007] Figure 3 describes a hard disk drive head gimbal assembly (HGA) with a 'U'shaped micro-actuator.
 - [0008] Figures 4 a-b provide an illustration of one embodiment of a micro-actuator and magnetic read/write head.
 - [0009] Figures 5 a-d provide an illustration of one embodiment of a packing tray and an exchange tray for a micro-actuator or a magnetic read/write head.
 - [0010] Figures 6 a-g provide an illustration of a method for using the packing tray and the exchange tray to inspect both sides of a micro-actuator or a magnetic read/write head.
 - [0011] Figure 7 provides an illustration of one embodiment of a head gimbal assembly packing tray.
- 15 [0012] Figures 8 a-d provide an illustration of a first method for using the head gimbal assembly packing tray.
 - [0013] Figures 9 a-b provide an illustration of one embodiment of a head gimbal assembly exchange tray.
 - [0014] Figures 10 a-f provides an illustration of a first method for using the head gimbal assembly packing tray and the head gimbal assembly exchange tray.

10

[0015] A method and mechanism for visually inspecting both sides of components for a hard disk drive are disclosed. In one embodiment, the components are stored in the containment units of a packing tray, with an exchange tray with matching containment units placed above and in contact with the packing tray. In a further embodiment, the components could be micro-actuators, magnetic read/write heads, head suspensions, head gimbal assemblies, or other parts of a hard disk drive. In one embodiment, the two trays are rotated, using gravity to cause the components to move from the packing containment unit to the exchange containment unit.

4

[0016] Illustrated in an upside-down orientation, Figure 3 describes one embodiment of a hard disk drive head gimbal assembly (HGA) with a 'U'-shaped micro-actuator. In one embodiment, a slider 302 is coupled to a 'U'-shaped micro-actuator. In a further embodiment, the base 304 of the 'U'-shaped micro-actuator has an arm 306 on each side, with a piezoelectric Lead Zirconate Titanate (PZT) beam (arm) 308 attached to each arm 306. In one embodiment, a printed circuit assembly 310 is electrically coupled to the slider 302 to control reading and writing functions. The micro-actuator is coupled to a suspension assembly 312, the suspension assembly being part of the head gimbal assembly (HGA) 314. A first hole 316 is cut into the HGA 314 to reduce weight. A second hole 318 allows the HGA 314 to be mounted on a pivot.

[0017] Figures 4 a-b illustrate one embodiment of a micro-actuator and slider 302.

Figure 4a illustrates one embodiment of the slider. In one embodiment, the slider has a top view 402 and a bottom view 404, each of which must be visually examined during

manufacture. Figure 4b illustrates one embodiment of the micro-actuator. In one embodiment, the micro-actuator has a base piece 304 with two arms 306 extending from the base piece 304. In a further embodiment, each arm 306 has a piezoelectric beam 308 coupled to each arm 306. In one embodiment, the slider 302 is coupled to the micro-actuator at a point 406 on each arm 306. The micro-actuator has a top side 408 and a bottom side 410, each of which must be visually examined during manufacture.

[0018] Figure 5 a-d illustrate one embodiment of the exchange tray and packing trays. Figure 5a shows one embodiment of the packing tray 502. In one embodiment, the packing tray 502 has a base 504 supporting one or more packing containment units 506, the packing containment units containing a magnetic read/write head, a micro-actuator, or some other component of the hard disk drive. In a further embodiment, these packing containment units are indentations shaped to fit the component being contained. In one embodiment, the corners of the packing tray are chamfered 508. In an alternate embodiment, the corners of the packing tray are squared 510. In one embodiment, an alignment bar 512 acts as a limiter, controlling the interaction between the packing tray and the other trays. In another embodiment, two pinholes 514 control the positioning of the packing tray 502 in relation to other trays.

10

[0019] Figure 5b illustrates one embodiment of the exchange tray 516. In one embodiment, the exchange tray 516 has a base 518 supporting one or more exchange containment units 520, the exchange containment units 520 matching the packing containment units 506 so as to allow components stored in the packing containment units 506 to be easily transferred from the packing containment units 520 to the exchange

containment units 506. In a further embodiment, these exchange containment units 520 are indentations shaped to fit the component being contained. In one embodiment, if the corners of the packing tray are chamfered 508, the corners of the exchange tray are chamfered 522. In an alternate embodiment, if the corners of the packing tray are squared 510, the corners of the exchange tray are squared 524. In one embodiment, an alignment indentation 526 acts as a limiter and is fitted to the limiter 512 of the packing tray 502. In another embodiment, two pinholes 528 allow the exchange tray to be aligned exactly above the packing tray 502.

6

[0020] Figure 5c illustrates an alternate embodiment of the alignment bar limiter 528.

In one embodiment, the alignment bar limiter is attached to either the exchange tray 516 or the packing tray 502, with corresponding indentations in the opposing tray. Figure 5d illustrates one embodiment of a packing method using the packing trays 502.

10

20

with the packing tray. Figure 6a illustrates one embodiment of the interaction of the exchange tray with the packing tray. Figure 6a illustrates one embodiment of a packing tray 502 containing multiple magnetic read/write heads 202 or micro-actuators available for inspection on one side. Figure 6b shows a close-up of this embodiment of the packing tray 502. In one embodiment, each of the magnetic read/write heads 202 or micro-actuators are placed within a packing containment unit 506. In one embodiment of the exchange process, illustrated in Figure 6c, the exchange tray 516 is inverted and positioned above the packing tray 502. In one embodiment, the exchange tray pinholes 528 are aligned with the packing tray pinholes 514 and the alignment indentation 526 is aligned with the alignment bar 512, causing the packing containment units 506 to be aligned with

the exchange containment units 520.

10

20

[0022] In one embodiment illustrated in Figure 6d, the exchange tray 516 is placed together with the packing tray 502. In one embodiment illustrated in Figure 6e, the exchange tray 516 and the packing tray 502 are rotated to position the packing tray 502 on top and the exchange tray 516 on the bottom. Gravity moves each magnetic read/write head 202 or micro-actuator from the packing containment unit 506 to the exchange containment unit 520. In one embodiment shown in Figure 6f, the packing tray is removed, leaving the exchange tray 516 with the magnetic read/write heads 202 or micro-actuator available for inspection on the opposite side. Figure 6g shows an enhanced view of the exchange tray 516, in which each magnetic read/write head 202 or micro-actuator is in an exchange containment unit 520.

7

[0023] An alternate embodiment of a packing tray, to be used to store a set of head gimbal assemblies 314 or suspensions, is shown in Figure 7. In one embodiment, the packing tray 702 has a series of packing alignment indentation limiters 704 and a pair of packing alignment pinholes 706. In a further embodiment, the packing tray 702 has a pair of ventilation slots 708 running through the center of the tray 702. In one embodiment, multiple packing sets of pins, each one including a main pin 710 and two secondary pins 712, are attached to the packing tray 702 to hold in place an HGA 314.

[0024] Figure 8a illustrates the packing tray as used in one embodiment of the current method. Figure 8b provides an enhanced view of the same embodiment, in which the main pin 710 is inserted into the pivot hole 318 of the HGA 314. In a further embodiment, the secondary pins 712 are used to hold in place the load beam of the HGA 314 or the

forward arm of the suspension. The head gimbal assemblies 314 or the head suspensions are then available for visual inspection on this side.

[0025] An alternate embodiment of an exchange tray, to be used to exchange a set of head gimbal assemblies 314 or suspensions, is shown in Figure 9a. In one embodiment, the exchange tray 902 has a series of exchange alignment bar limiters 904 and a pair of exchange alignment pinholes 906. In a further embodiment, the exchange tray 902 has a pair of ventilation slots 908 running through the center of the tray 902. In one embodiment illustrated in the enhanced view of Figure 9b, multiple exchange sets of pins, including a main pin 910 and two secondary pins 912, are attached to the exchange tray 902 to receive an HGA 314 from the packing tray 702.

10

[0026] In one embodiment of the next step in the exchange process, as illustrated in the Figure 10a, the exchange tray 902 is inverted and placed above the packing tray 702. In one embodiment, one or more of the packing sets of pins has an HGA 314 affixed to it, with the pivot hole 318 around the main pin 910 and the arm of the HGA between the two secondary pins 912. In one embodiment, the exchange alignment bar limitations 904 are aligned above the corresponding packing alignment indentation limitations 704 and the exchange alignment pinholes 906 are aligned above the packing alignment pinholes 706, causing the exchange set of pins to be positioned above the packing set of pins. As shown in Figure 10b, the exchange tray 902 is pressed to the packing tray 702, with the exchange alignment bars 904 inserted into the packing alignment indentations 704. In one embodiment, the two trays are joined together by inserting a pin through an exchange pinhole 906 and a packing pinhole 706. As shown in the perspective view of Figure 10c

700 2-1-1-1

and the side view of Figure 10d, the head gimbal assemblies all are placed so that the main pins 710 of the packing tray 712 are in the pivot holes 318 of the head gimbal assemblies, and the arms of the head gimbal assemblies 314 are between the secondary pins 712.

and the arms of the head gimbal assemblies 314 are between the secondary pins 712.

[0027] In one embodiment of the process, the two trays are then rotated so that the exchange tray 902 is on bottom and the packing tray 702 is on top, using gravity to shift the head gimbal assemblies 314 or the head suspensions from the packing tray to the exchange tray. As illustrated in Figure 10e, the packing tray 702 is removed so that the opposite sides of the head gimbal assemblies 314 or the head suspensions are available in the exchange tray 902 for visual inspection. As shown in the enhanced the view of Figure 10f, the head gimbal assemblies or the head suspensions now rest in the exchange tray 902, with the pivot holes 318 around the main pins 910 and the arm of the head gimbal assemblies positioned between the secondary pins 912.

will be appreciated that modifications and variations of the present invention are covered
by the above teachings and within the purview of the appended claims without departing
from the spirit and intended scope of the invention.

[0028] Although several embodiments are specifically illustrated and described herein, it

What is claimed is

1. An exchange tray comprising:

an exchange containment unit matching a packing containment unit of a packing tray

- to receive a component of a hard disk drive; and
 - an exchange base to support the exchange containment unit.
 - 2. The exchange tray of claim 1, wherein the exchange tray is able to contain a plurality of components.
 - The exchange tray of claim 1, wherein the exchange containment unit is an indentation shaped to hold the component.
 - The exchange tray of claim 1, wherein the exchange containment unit is a set of pins to hold the component.
 - The exchange tray of claim 1, further comprising a limiter attached to the exchange base to match a limiter of the packing tray.
- 20 6. The exchange tray of claim 1, wherein the component is a magnetic read/write head.
 - 7. The exchange tray of claim 1, wherein the component is a micro-actuator.
 - 8. The exchange tray of claim 1, wherein the component is a head gimbal assembly.
 - 9. The exchange tray of claim 1, wherein the component is a head suspension.
 - 10. The exchange tray of claim 1, further comprising at least one pin hole in the exchange base matching at least one pin hole in the packing tray.

25

10

15

11. The exchange tray of claim 1, wherein the component is moved from the packing tray to the exchange tray by positioning the exchange tray above and in contact with the packing tray and rotating the packing tray and the exchange tray together.

12. A system, comprising:

1112

10

a packing tray with a packing containment unit to hold a component of a hard disk drive; and

an exchange tray with an exchange containment unit matching the packing containment unit to receive the component.

- 13. The system of claim 12, wherein the exchange tray and the packing tray are able to contain an equal plurality of components.
- 14. The system of claim 12, wherein the exchange containment unit is an indentation 15 shaped to hold the component.
 - 15. The system of claim 12, wherein the exchange containment unit is a set of pins to hold the component.
- 20 16. The system of claim 12, further comprising a limiter attached to the exchange base to match a limiter of the packing tray.
 - 17. The system of claim 12, wherein the component is a magnetic read/write head.
- 25 18. The system of claim 12, wherein the component is a micro-actuator.
 - 19. The system of claim 12, wherein the component is a head gimbal assembly.
 - 20. The system of claim 12, wherein the component is a head suspension.

- 21. The system of claim 12, further comprising at least one pin hole in the exchange base matching at least one pin hole in the packing tray.
- 22. The system of claim 12, wherein the component is moved from the packing tray to the exchange tray by positioning the exchange tray above and in contact with the packing tray and rotating the packing tray and the exchange tray together.

23. A method, comprising:

placing a component of a hard disk drive in a packing containment unit of a packing tray;

positioning an exchange tray with an exchange containment unit matching the packing containment unit above and in contact with the packing tray; and

rotating the packing tray and the exchange tray together to move the component from the packing tray to the exchange tray.

24. The method of claim 23, further comprising:

holding a plurality of components in the packing tray simultaneously; and transferring the plurality of components to the exchange tray simultaneously.

- 20 25. The method of claim 23, wherein the exchange containment unit is an indentation shaped to hold the component.
 - 26. The method of claim 23, wherein the exchange containment unit is a set of prongs to hold the component.
 - 27. The method of claim 23, wherein a limiter attached to the exchange base matches a limiter of the packing tray.
 - 28. The method of claim 23, wherein the component is a magnetic read/write head.

30

25

10


15


- 1 OX / OM | OW | O O O X O
- 29. The method of claim 23, wherein the component is a micro-actuator.
- 30. The method of claim 23, wherein the component is a head gimbal assembly.
- 5 31. The method of claim 23, wherein the component is a head suspension.
 - 32. The method of claim 23, further comprising securing at least one pin hole in the exchange base to at least one pin hole in the packing tray.


ABSTRACT

5


A method and mechanism for visually inspecting both sides of components for a hard disk drive are disclosed. The components are stored in the containment units of a packing tray, with an exchange tray with matching containment units placed above and in contact with the packing tray. The components could be magnetic read/write heads, head gimbal assemblies, or other parts of hard disk drive. The two trays are rotated, using gravity to cause the components to move from the packing containment unit to the exchange containment unit.

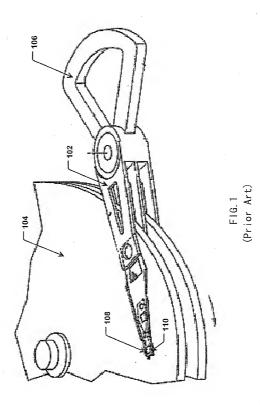


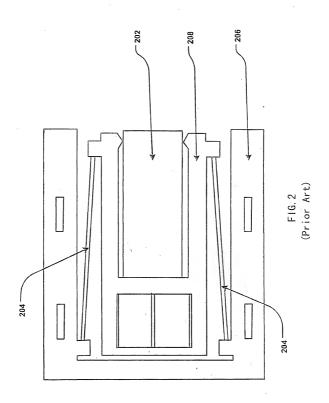


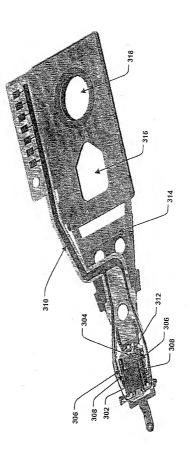

F16.3

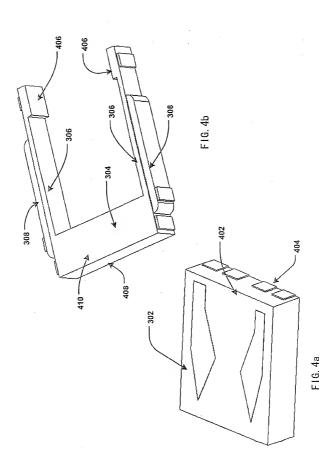

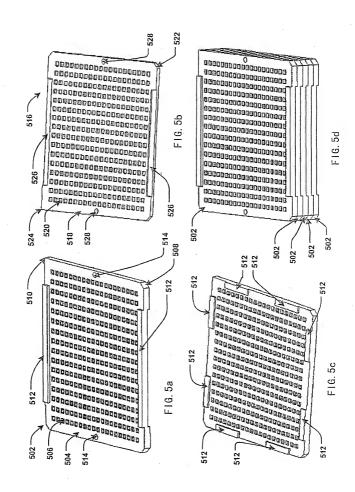

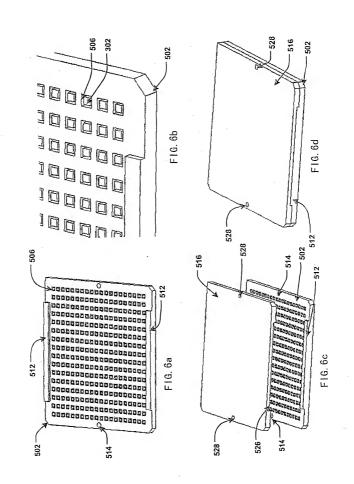

2 (12) (1) (0) (0)

